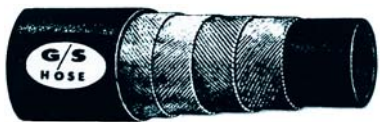



RAINKING WATER SUCTION HOSE

For heavy duty suction and low pressure discharge service in the transfer of water, slurry and small solids in the construction, agriculture, and mining industries. Used for septic tank cleaning and sewage handling. Smooth rubber tube will not absorb water, reinforced with multiple textile plies and helix of high tensile steel wire. Tough black rubber cover resists abrasion and weather. Available with M&F fittings, M&M fittings, and Part C & Nipple.

	Size ID	Size OD	Max Working Pressure	Appx. Weight / Foot	Lengths Available
	1½"	1¾"	100 psi	0.80	10, 15, 20 and 25 ft
	2"	2¾"	80 psi	1.00	10, 15, 20 and 25 ft
	3"	3½"	60 psi	2.10	10, 15, 20 and 25 ft
	4"	4¾"	50 psi	3.30	10, 15, 20 and 25 ft
	6"	6¾"	50 psi	5.00	10, 15, 20 and 25 ft


FLEXIBLU PVC WATER DISCHARGE HOSE

Blue PVC with textile reinforcement for low pressure, open end service. Use wherever lightweight, economical discharge hose is required. Available with M&F fittings and C&E quick couplings.

	Size ID	Max Working Pressure	Appx. Weight / Foot	Lengths Available
	1½"	80 psi	0.18	25, 50 and 100 ft
	2"	80 psi	0.23	25, 50 and 100 ft
	3"	80 psi	0.32	25, 50 and 100 ft
	4"	70 psi	0.45	25, 50 and 100 ft
	6"	60 psi	0.73	25, 50 and 100 ft


MILL HOSE

Available in both single jacket or double jacket with rubber lining. For open end water discharge and light duty washdown service. Synthetic jacket resists rot and mildew. Ideal for filling water tanks on equipment. Available with M&F IPT or NST fittings attached.

	Size ID	Single Jacket Max Working Pressure	Double Jacket Max Working Pressure	Lengths Available
	1½"	80	175 psi	25, 50 and 100 ft.
	2½"	80	175 psi	25, 50 and 100 ft.


CONTRACTORS WATER HOSE

Black EDPM rubber contractors grade water hose designed for rugged washdown service. M&F fittings attached.

	Part No.	Size ID	Thread	Max Working Pressure	Lengths Available
	750-C	¾"	GHT	150 psi	25, 50 and 100 ft
	1000-C	1"	IPT	200 psi	25, 50 and 100 ft

JACK HAMMER HOSE

For air service in construction and industrial applications. Oil resisting tube is reinforced with two braids of high tensile yarn and an abrasion resistant red cover. Hose comes complete in 50 foot lengths with universal quick couplings attached on both ends.

	Size ID	Size OD	Working Pressure	Weight
	¾"	1¾"	250 psi	23