

LED LIGHTS



- No. LED625F**
- High impact LED strobe light
  - 360° display
  - (4) User selected flash patterns
  - Flange Base
  - Permanent or magnetic mount



- No. MMBSLEDFL-C/A**  
**No. MMBSLEDFLM-C/A (Magnetic)**
- Low profile LED mini bar
  - Clear outer lens / 24 high output amber LEDs
  - Cycles thru 3 unique flash patterns
  - 12/24V high impact LED display



- No. LED5000**
- Compact surface-mount package with mounting gasket
  - Fully encapsulated circuitry, weatherproof
  - Two heads can be converted for alternating flash patterns
  - Optional "L" mounting bracket available



- No. TA9L-A**
- Deck light
  - (2) Rapid fire LED lamps
  - Flashes back and forth for an attention getting flash pattern
  - Designed for indoor / outdoor use
  - Includes "L" mounting bracket



- No. TA36L-A**
- Direct traffic around slow moving or stopped vehicles
  - (8) LED lamp assembly
  - (3) Modes / (2) Speeds
  - Complete with 25' cable
  - Touch pad controller




- No. 4WABLED**
- (10) 4" round LED lamps
  - (4) Active modes (left, right, center 4 lamps or "all on")
  - Includes 25' cable and 3 rocker switch control
  - Aluminum housing with flange on back for easy flat surface mounting



- No. WBE10** Rectangular for oval heads  
**No. WBE20** Rectangular for (2) oval heads  
**No. WBE1R** Square for 4" round heads
- Steel weld box precision cut, formed and welded to exacting standards
  - Powder coated black



- No. LEDQO**-\* oval  
**No. LEDQR**-\* round
- (21) High impact LEDs
  - (3) Steady burn LEDs in center
  - Includes rubber grommet and 3 wire pigtail
  - Flush mount

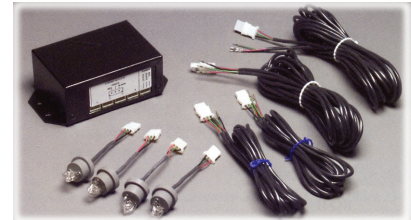

- No. CLK2H45** 45 watt / (2) head / (2) 25' cables  
**No. CLK4H45** 45 watt / (4) head / (2) 15' (2) 25' cables  
**No. CLK4H70** 70 watt / (4) head / (2) 15' (2) 25' cables
- Strobe light bulbs install in existing corner light housings

Model No.	Description	FPM	Height - Diameter	Weight	Voltage	Amp @ 12V	Warranty
LED625F	LED strobe	User select	4½" x 5½"	1.5 lbs.	12/24V	1.60	5 year
MMBSLED-FL-C/A	Economy Low-Profile LED mini bar	3 Patterns	2¾" x 8½" x 17¼"	8 lbs.	12/24V	1.4	5 year
LED5000-*	LED surface mount	User select	4½" x 2¼" x 2"	2 lbs.	12/24V	1.75	5 year
TA9L-A	LED deck	160	2¼" x 8"	3 lbs.	12/24V	0.25	5 year
TA36L-A	LED bar	Sequencing	2¼" x 3" x 34½"	12 lbs.	12/24V	2.20	5 year
4WABLED	LED directional arrow	60 single	13" x 53"	10 lbs.	12/24V	2.25	5 year
LEDQO-A	LED flush mount	70 Quad	6¼" x 2¼"	1 lb.	12/24V	0.33	5 year
LEDQR-A	LED Flush mount	70 Quad	4" Round	1 lb.	12/24V	0.33	5 year

\* Available in amber, clear, red and blue