

SINGLE TRUCK CHAINS

RECOMMENDED FOR HIGHWAY USE
AVAILABLE REGULAR SIDE CHAIN



Tire Sizes					Part No.	Wt./Pr. Lbs.	Replacement Cross Chain	Cross Chain per 1/2 Pair
7.00-14LT 185-14	P205/75R14 195/75R14LT	205/60R17.5 28X8.50-14			2209	20	6219	11
H70-14ST H78-14ST	27X8.50-14LT H78-15ST	LR78-15 6.70-15LT	7.00-15LT P215/75R15	195/75R15LT 7-17.5LT	2211	23		13
9-14.5MH 215/75R14LT H78-15LT P225/75R15	P235/75R15 215/75R15LT 30X9.50-15 6.50-16LT	8.00-16.5 P225/70R16 P225/75R16 205R16	225/75R16LT 255/75R16LT P235/65R17 235/65R17	235/80R17 235/60R18	2216	23	6221	12
7.00-15TR 7.50-15LT P275/60R15 235/75R15LT 245/70R15LT	245/75R15LT 7.00-16LT 8.75-16.5 215/80R16LT 215/85R16LT	235/75R16LT 245/70R16LT 255/65R16LT 8.75-16LT 225/65R18	8.50-17.5 215/70R17.5 P235/50R18 P255/45R18 225/65R18	235/65R18	2219	24		13
NR78-15 7.50-15TR 275/60R15LT	LR78-16 7.50-16LT 9.50-16.5	235/85R16LT 7.00-17LT	215/75R17.5		2221	25		14
7.50-17	245/70R17LT	225/70R17.5	7.00-18	8-19.5	2214	27		15
P245/65R15 P245/70R15 P255/70R15 P265/70R15 P265/75R15 255/75R15LT 29X9.50-15 P235/70R16 275/60R16LT P245/70R16	P245/75R16 P255/65R16 P255/70R16 P275/60R16 235/70R16LT 235/80R16 245/75R16LT 255/70R16LT 265/50R16LT	30X9.50-16LT 31X11.50-16 32X9-16LT 32X10.00-16LT 16LT 10-16.5LT P245/55R17 P245/65R17 P245/70R17 P255/55R17	P255/60R17 P255/65R17 P275/60R17 235/80R17 275/60R17 225/55R18 P255/55R18 255/55R18 255/60R18		2229	24		6225
8.25-15TR P275/70R16	255/85R16LT 225/70R19.5	245/70R19.5 275/55R20	P275/60R20		2228	28	14	
7.50-18	6.50-20	7.00-20			2233	39	6251	11
9.00-15TR 9.00-16LT 9R17.5	10R17.5 265/70R19.5 7.50-20	8-22.5 235/80R22.5 255/70R22.5			2237	41		12
10-15TR 11R17.5 8.25-20	9-22.5 245/75R22.5 255/80R22.5	275/70R22.5 QR78-16			2239	44		13
	9.00-20	10-22.5	265/75R22.5		2241	48		14
10.00-20	11-22.5		275/80R22.5		2245	49		15
295/75R22.5	285/75R24.5	275/80R24.5			2247	50	6253	14
10.00-22	11-24.5				2249	53		15
11.00-15TR	11.00-20	12-22.5	12.5-22.5	295/80R22.5	2251	63	6260	14
11.00-24					N/A	71		16
12.00-20	13/80R20	11.00-22	315/80R22.5	12-24.5	2255	67	6263	14
13.00-20	14/80R20	365/80R20	12.00-24		2257	75		16
14.00-20	14.00R21	13.00-24			2271	78	6266	16
14.00-24					2273	87		18

SINGLE TRUCK CHAINS

REINFORCED SINGLE TRUCK CHAINS

REINFORCED CROSS CHAIN FOR INCREASED TRACTION
 AVAILABLE IN REGULAR SIDE CHAIN
 RECOMMENDED FOR OFF-ROAD USE

Tire Sizes					Part No.	Wt./Pr. Lbs.	Replacement Cross Chain	Cross Chain per 1/2 Pair
7.00-14LT 185-14	P205/75R14 195/75R14LT	205/60R17.5 28X8.50-14			2809	22	6819	11
H70-14ST H78-14ST	27X8.50-14LT H78-15ST	LR78-15 6.70-15LT	7.00-15LT 215/75R15	195/75R15LT 7-17.5LT	2811	25		13
9-14.5MH 215/75R14LT H78-15LT	P225/75R15 P235/75R15 215/75R15LT	30X9.50-15 6.50-16LT 8.00-16.5	P225/70R16 P225/75R16 205R16 225/75R16LT	255/75R16LT P235/65R17 235/65R17 235/60R18	2816	25	6821	12
7.00-15TR 7.50-15LT P275/60R15 235/75R15LT	245/70R15LT 245/75R15LT 7.00-16LT 8.75-16.5	215/80R16LT 215/85R16LT 235/75R16LT 245/70R16LT	255/65R16LT 8.75-16LT 8-17.5 8.50-17.5	215/70R17.5 P235/50R18 P255/45R18 225/65R18 235/65R18	2819	26		13
NR78-15 7.50-15TR 275/60R15LT	LR78-16 7.50-16LT 9.50-16.5	235/85R16LT 7.00-17LT	215/75R17.5		2821	28		14
7.50-17	245/70R17LT	225/70R17.5	7.00-18	8-19.5	N/A	33		15
P245/65R15 P245/70R15 P255/70R15 P265/70R15 P265/75R15 255/75R15LT 29X9.50-15 P235/70R16 P245/70R16	P245/75R16 P255/65R16 P255/70R16 P275/60R16 235/70R16LT 235/80R16 245/75R16LT 255/70R16LT 265/50R16LT	275/60R16LT 30X9.50-16LT 31X11.50-16 32X9-16LT 32X10.00- 16LT 10-16.5LT P245/55R17 P245/65R17 P245/70R17	P255/55R17 P255/60R17 P255/65R17 P275/60R17 235/80R17 275/60R17 225/55R18 P255/55R18 255/55R18	255/60R18	2829	27	6825	12
8.25-15TR P275/70R16	255/85R16LT 245/70R19.5	225/70R19.5 P275/60R20	275/55R20		2828	32		14
7.50-18	6.50-20	7.00-20			2833	43	6822	11
9.00-15TR 9.00-16LT	9R17.5 10R17.5	7.50-20 265/70R19.5	235/80R22.5 8-22.5	255/70R22.5	2837	45		12
10-15TR 11R17.5	8.25-20 9-22.5	245/75R22.5 255/80R22.5	275/70R22.5	QR78-16	2839	47		13
	9.00-20	10-22.5	265/75R22.5		2841	55		14
10.00-20	11-22.5		275/80R22.5		2845	60		15
295/75R22.5	285/75R24.5	275/80R24.5			2847	56	6853	14
10.00-22	11-24.5				2849	59		15
11.00-15TR	11.00-20	12-22.5	12.5-22.5	295/80R22.5	2851	68	6860	14
12.00-20	13/80R20	11.00-22	315/80R22.5	12-24.5	2855	71	6863	14
13.00-20	14/80R20	365/80R20	12.00-24		2857	81		16
14.00-20	14.00R21	13.00-24			2871	80	6866	16
14.00-24					2873	94		18



REINFORCED SINGLE TRUCK CHAINS

DUAL-TRIPLE TRUCK CHAINS

RECOMMENDED FOR HIGHWAY USE
AVAILABLE IN REGULAR SIDE CHAIN



Tire Sizes					Part No.	Wt./Pr. Lbs.	Replacement Cross Chain	Cross Chain per 1/2 Pair
7.00-15TR	245/70R15LT	215/80R16LT	255/65R16LT	215/70R17.5	4219	44	6221	26
7.50-15LT	245/75R15LT	215/85R16LT	8.75-16LT	P235/50R18				
P275/60R15	7.00-16LT	235/75R16LT	8-17.5	P255/45R18				
235/75R15LT	8.75-16.5	245/70R16LT	8.50-17.5					
NR78-15	275/60R15LT	7.50-16LT	235/85R16LT	7.00-17LT	4221	48	28	
7.50-15TR	LR78-16LT	9.50-16.5		215/75R17.5				
8.25-15TR	255/85R16LT	225/70R19.5	P275/60R20		4231	52	6225	28
P275/70R16		245/70R19.5						
10.00-15TR	11R17.5	9-22.5	255/80R22.5	275/70R22.5	4239	76	6251	26
QR78-16	8.25-20	245/75R22.5						
265/70R19.5	9.00-20	10-22.5	265/75R22.5		4241	82	6253	28
10.00-20	11-22.5		275/80R22.5		4245	90		30
295/75R22.5	275/80R24.5	285/75R24.5			4247	91	6253	28
10.00-22	11-24.5				4249	96		30
11.00-20	12-22.5	12.5-22.5	295/80R22.5		4251	117	6260	28
12.00-20	13/80R20	11.00-22	315/80R22.5	12-24.5	4255	122	6263	28
14/80R20	13.00-20	365/80R20	12.00-24		4257	134		32

REINFORCED DUAL-TRIPLE TRUCK CHAINS

REINFORCED CROSS CHAIN FOR INCREASED TRACTION
RECOMMENDED FOR OFF-ROAD USE
AVAILABLE IN R—REGULAR SIDE CHAIN



Tire Sizes					Part No.	Wt./Pr. Lbs.	Replacement Cross Chain	Cross Chain per 1/2 Pair
7.00-15TR	245/70R15LT	215/80R16LT	255/65R16LT	215/70R17.5	4819	48	6821	26
7.50-15LT	245/75R15LT	215/85R16LT	8.75-16LT	P235/50R18				
P275/60R15	7.00-16LT	235/75R16LT	8-17.5	P255/45R18				
235/75R15LT	8.75-16.5	245/70R16LT	8.50-17.5					
NR78-15	275/60R15LT	7.50-16LT	235/85R16LT	7.00-17LT	4821	53	28	
7.50-15TR	LR78-16LT	9.50-16.5		215/75R17.5				
8.25-15TR	255/85R16LT	P275/60R17	245/70R19.5		4831	58	6825	28
P275/70R16	P265/70R17	225/70R19.5	P275/60R20					
10.00-15TR	11R17.5	9-22.5	255/80R22.5	275/70R22.5	N/A	90	6822	26
QR78-16	8.25-20	245/75R22.5						
9.00-20	10-22.5	265/75R22.5	265/70R19.5		4841	96	6822	28
10.00-20	11-22.5		275/80R22.5		4845	102		30
295/75R22.5	275/80R24.5	285/75R24.5			4847	102	6853	28
10.00-22	11-24.5				4849	110		30
11.00-20	12-22.5	295/80R22.5			4851	122	6880	28
12.00-20	13/80R20	11.00-22	315/80R22.5	12-24.5	4855	130	6863	28
13.00-20	14/80R20	365/80R20	12.00-24		4857	150		32

TRUCK CHAINS - DUAL & WIDE BASE

DESIGNED FOR USE ON MOST 4-WHEEL DRIVE VEHICLES AND SUPER SINGLE TIRES

Tire Sizes				Part No.	Weight per Pair	Cross Chain	Cross Chains per 1/2 Pair		
Single Mount				Dual Mount					
8.25-15LT	P265/75R16	245/75R17LT	275/55R18	3210	26	6225	13		
10-15LT	245/85R16LT	255/60R17							
265/70R15LT	265/70R16LT	P255/70R17							
265/75R15LT	265/75R16LT	P265/65R17							
305/50R15	265/80R16LT	P265/70R17							
31X10.50-15LT	275/70R16LT	265/70R17LT							
33X10.50-15	295/50R16LT	275/65R17							
P265/70R16	P235/70R17	235/75R17.5							
PR78-15	34X9.50-15LT	32X11.50-16LT	305/45R17	3227	37	6253	10		
11-15LT	PR78-16	33X13.50-16	P265/60R18						
31X11.50-15LT	12-16.5LT	34X9-16	285/60R18						
32X11.50-15LT	P285/60R16	31X10.50-	285/65R18LT						
33X9.50-15LT	275/65R16LT	16.5LT	285/45R19						
33X13.50-15	285/60R16LT	285/60R17	275/60R20						
		285/70R17	P285/50R20						
31X12.50-16	265/70R18	275/65R18		3228	38		9		
12-15LT	35X12.50-15	305/85R16LT	285/75R17LT	3229	40	6259	10		
P315/70R15	35X13.5-15	315/75R16LT	295/70R17LT						
325/60R15	35X14.5-15	35X12.5-16	33X12.50-17						
31X13.5-15	11L16	35X13.5-16	10.50/80R18						
32X12.50-15	285/70R16LT	36X13-16	275/70R18LT						
33X12.50R15	285/75R16LT	32X12.50-	325/60R18						
33X14-15	295/75R16LT	16.5LT	275/65R20LT						
33X14.50-15	305/70R16LT	33X12.5-16.5	305/50R20						
		33X15.5-16.5	305/55R20						
		275/70R17							
QR78-15	35X12.50-16.5	35X12.50-17	35X12.50-20	3231	42		11		
37X13-15	38X12.50-16.5	37X12.50-17							
345/55R16LT	315/70R17LT	305/60R18							
37X12.50-16	325/70R17	325/65R18							
38X13-16	345/55R17	325/60R20							
35X14-15	36X12.5-16.5	38X15.5-16.5	37X13.5-17	3235	46		12		
36X12.50-15	36X14-16.5	355/70R17LT	14-17.5						
37X13.50-15	37X12.5-16.5	37X13.5-17	285/70R19.5						
35X14-16									
35X15-15	35X16-15	38.5X14.5-15	365/65R16	7.00-15TR	7-17.5	6265	9		
35X15.5-15	36X14.5-15	38.5X15-15		6.50-16LT					
37X14.50-15	38X14.50-16	40X17-16.5	37X13.50-22	7.50-15LT	7.00-16LT	6267	10		
39.5X15-15	325/80R16	355/65R18		7.50-15TR	7.00-17				
40X17-15	39.5X15-16.5	37X13.50-20							
355/80R20	13-22.5	15-22.5	385/65R22.5	3255	69	7213	14		
42X15-16.5	38X13.5-20			7.00-18	6.50-20	7214	11		
355/60R20				8-19.5	7-22.5				
18-22.5	445/65R22.5			3261	81				16
38.5X16-15	39.5X15-16	39.5X18-16.5	15-19.5	7.50-17		7215	11		
39.5X18-15	38.5X16-16	38X15.5-18	38X15.50-20	7.00-20					
445/50R22.5	455/55R22.5			3269	71				13
445/65R19.5	16.5-22.5	425/65R22.5		3271	73				14



DUAL & WIDE BASE TRUCK CHAINS

LIGHT TRUCK SINGLE CABLE CHAINS



Tire Sizes					Part No.	Wt./Pr. Lbs.	Replacement Cross Chain	Cross Chain per 1/2 Pair
E78-14LT	185-14	E78-14ST	195/75R14LT		2009	10	8819	11
7.00-14LT	28X8.50-14	P205/75R14	205/60R17.5					
27X8.50-14LT	LR78-15	7.00-15LT	195/75R15LT		2011	12	8819	13
H78-15ST	6.70-15LT	P215/75R15	7-17.5LT					
7.50-17	245/70R17LT	225/70R17.5	7.00-18	8-19.5	2014	13	8821	15
9-14.5MH	P225/75R15	30X9.50-15	P225/75R16	P235/65R17	2016*	11		8821
215/75R14LT	P235/75R15	6.50-16LT	205R16	235/60R18				
H78-15LT	215/75R15LT	8.00-16.5	225/75R16LT		2019*	12	8821	13
		P225/70R16	255/75R16LT					
7.00-15TR	245/70R15LT	215/80R16LT	255/65R16LT	8.50-17.5	2019*	12	8821	13
7.50-15LT	245/75R15LT	215/85R16LT	8.75-16.5	P235/50R18				
P275/60R15	7.00-16LT	235/65R17	215/70R17.5	P255/45R18	2021*	12	8821	14
235/75R15LT	8.75-16LT	235/75R16LT	8-17.5	225/65R18				
NR78-15	LR78-16LT	235/85R16LT	7.00-17LT		2021*	12	8821	14
7.50-15TR	7.50-16LT	255/85R16LT	215/75R17.5					
275/60R15LT		9.50-16.5LT			2028*	14	8825	12
8.25-15TR	225/70R19.5	245/70R19.5	P275/60R20					
P275/70R16					2029*	12	8825	12
P245/65R15	10-16.5	235/70R16LT	32X9-16LT	P255/65R17				
P245/70R15	P235/70R16	235/80R16	32X10.00-	225/55R18	2029*	12	8825	12
P255/70R15	P245/70R16	245/75R16LT	16LT	P255/55R18				
P265/70R15	P245/75R16	255/70/	P245/55R17	255/55R18	2029*	12	8825	12
P265/75R15	P255/65R16	R16LT	275/55R17	255/60R18				
255/75R15LT	P255/70R16	265/50R16LT	P245/65R17	255/50R19	2033	14	8851	13
29X9.50-15	P275/60R16	265/60R16	P245/70R17	245/45R20				
	275/60R16LT	30X9.50-16	P255/55R17	255/45R20				
		31X11.50-16	P255/60R17					
7.50-18	6.50-20	7.00-20			2033	14	8851	13

* Now meets SAE Class S requirements

HEAVY TRUCK SINGLE & DUAL-TRIPLE CABLE CHAINS



Tire Sizes			Singles			Dual-Triples			Replacement Cross Chain		
			Part No.	Weight	Cross Chain per 1/2 Pair	Part No.	Weight	Cross Chain per 1/2 Pair			
9.00-15TR	10R17.5	8-22.5	2037	14	14	4037	28	28	8851		
9.00-16LT	265/70R19.5	235/80R22.5									
315/75R16LT	285/70R19.5	255/70R22.5									
35X12.516	7.50-20										
9R17.5											
10.00-15TR	8.25-20	255/80R22.5	2039	15	15	4039	31	30		8851	
QR78-16	9-22.5	275/70R22.5									
11R17.5	245/75R22.5										
9.00-20	10-22.5	275/80R22.5	2041	16	16	4041	27	32	8853		
	265/75R22.5	295/75R22.5									
10.00-20	275/80R24.5	285/75R24.5	2045	18	16	4045	33	32			8853
11-22.5											
10.00-22	12.5-22.5		2049	18	17	4049	31	34		8853	
12-22.5	11-24.5										

CABLE CHAINS

WIDE BASE TRUCK CABLE CHAINS

Tire Sizes				Part No.	Wt./Pr. Lbs.	Replacement Cross Chain	Cross Chain per 1/2 Pair
8.25-15LT	P265/75R16	235/80R17LT	275/65R17	3010*	14	8825	13
10-15LT	245/85R16LT	245/75R17LT	235/75R17.5				
265/70R15LT	265/70R16LT	255/60R17	275/55R18				
265/75R15LT	265/75R16LT	P255/70R17	275/45R19				
305/50R15	265/80R16LT	P265/65R17	255/50R20				
31X10.50-15LT	275/70R16LT	P265/70R17	265/50R20				
33X10.50-15	295/50R16LT	265/70R17LT	275/40R20				
P265/70R16	P235/70R17	275/60R17	275/45R20				
PR78-15	PR78-16	33X13.50-16	285/60R18	3027*	12	8853	11
11-15LT	12-16.5LT	34X9-16	285/45R19				
31X11.50-15LT	P285/60R16	31X10.50-16.5LT	275/55R20				
32X11.50-15LT	275/65R16LT	285/60R17	275/60R20				
33X9.50-15LT	285/60R16LT	285/70R17	P285/50R20				
33X13.50-15	32X11.50-16LT	305/45R17					
34X9.50-15LT		P265/60R18					
12-15LT	35X13.5-15	35X13.5-16	10.50/80R18	3029*	14	8859	11
P315/70R15	35X14.5-15	36X13-16	275/70R18LT				
325/60R15	11L16	32X12.50-16.5LT	285/65R18LT				
31X13.5-15	285/70R16LT	33X12.5-16.5	325/60R18				
32X12.50-15	285/75R16LT	33X15.5-16.5	275/65R20LT				
33X12.50R15	295/75R16LT	275/70R17	305/50R20				
33X14-15	305/70R16LT	285/75R17LT	305/55R20				
33X14.50-15	305/85R16LT	295/70R17LT	305/40R22				
		33X12.50-17	305/45R22				
355/80R20	13-22.5	15-22.5	385/65R22.5	3055	23	8813	16
38.5X16-15	39.5X18-16.5	15-19.5	38X15.50-50	3065	22	8815	13
39.5X18-15	38X15.5-18	40X15.50-22					13
425/65R22.5	445/50R22.5	455/55R22.5		3069	24		14
445/65R19.5	16.5-22.5			3071	26		



* Now meets SAE Class S requirements

WIDE BASE CABLE CHAINS

RULES FOR USING TIRE CHAINS

****IMPORTANT** PRE FIT CHAINS PRIOR TO ACTUAL USE**

For Your Convenience & Safety:

- Consult owner's manual to see if chains can be used on your vehicle.
- Make certain your tire chains are properly sized for your tires. A proper fit is key to performance.
- Follow directions for installing tire chains. Apply as tightly as possible by hand for maximum chain life.
- Be sure to pull off highway to a safe place before installing, servicing or removing tire chains.
- Do not deflate tires to install tire chains.
- Drive approximately ¼ mile. Stop and retighten. Extra links may be cut or preferably retained on the fastener arm. Keep chains tight to snug throughout the operation. Only after retightening may rubber adjusters be applied. **DO NOT USE** adjusters on "all cable type" chains.
- Do not exceed 30 M.P.H. Accelerate and decelerate slowly. Avoid spinning or locking of wheels.
- If a cross chain should fail, stop immediately. Repair or remove. **DO NOT** drive with a broken chain.
- Avoid hitting curbs with tire chains.

NORMAL (Chains installed as tight as possible by hand.)	
	30 MPH – Max. Chain Life
	40 MPH – 57% Chain Life
	50 MPH – 31% Chain Life
LOOSE (Chains loosened by one link each side.)	
	30 MPH – 50% Chain Life
	40 MPH – 16% Chain Life
	50 MPH – 7% Chain Life

SINGLE MUD SERVICE TRUCK CHAINS

EXTRA HEAVY DUTY CONSTRUCTION FOR OFF-ROAD USE



Tire Sizes					Part No.	Wt./Pr. Lbs.	Replacement Cross Chain	Cross Chain per 1/2 Pair
7.00-15TR	9.00-15TR	8.75-16.5	235/70R16LT	215/70R17.5	2435	38	6256	9
7.50-15LT	235/75R15LT	215/85R16LT	245/70R16LT					
7.50-15TR	7.00-16LT	225/75R16LT	8-17.5					
NR78-15	265/75R15	31X10.50-15	9.50-16.5	2437	41	6256	10	
P245/70R15	P275/60R15	LR78-16LT	7.00-17LT					
P255/70R15	275/60R15LT	7.50-16LT	235/80R17					
255/65R15LT	30X9.50-15LT	235/85R16LT	215/75R17.5					
33X10.50-15	7.50-17	7.00-18	225/70R19.5	2439	43	6260	10	
245/75R16LT	225/70R17.5	8-19.5	245/70R19.5					
315/75R16	235/75R17.5	7.50-20	235/80R22.5	255/70R22.5	2441	65	6434	11
10.00-15TR	8.25-20	9-22.5	245/75R22.5	255/80R22.5				
10-15LT								
9.00-20	10-22.5	265/75R22.5			2445	71		12
10.00-20	11-22.5	275/70R22.5			2448	81		13
11.00-20	12-22.5	295/75R22.5	275/80R24.5		2452	83	6438	14
10.00-22	275/80R22.5	11-24.5	285/75R24.5					
12.00-20	11.00-22	12-24.5			2486	90	6438	14
13/80R20	315/80R22.5							
295/80R22.5	11.00-24				2470	99		15

DUAL-TRIPLE MUD SERVICE TRUCK CHAINS

EXTRA HEAVY DUTY CONSTRUCTION FOR OFF-ROAD USE



Tire Sizes					Part No.	Wt./Pr. Lbs.	Replacement Cross Chain	Cross Chain per 1/2 Pair
NR78-15	265/75R15	31X10.50-15	9.50-16.5	4412	66	6256	20	
P245/70R15	P275/60R15	LR78-16LT	7.00-17LT					
P255/70R15	275/60R15LT	7.50-16LT	235/80R17					
255/65R15LT	30X9.50-15LT	235/85R16LT	215/75R17.5					
10.00-15TR	235/75R17.5	7.50-20	235/80R22.5	255/70R22.5	4435	120	6434	22
10-15LT	8.25-20	9-22.5	245/75R22.5	255/80R22.5				
9.00-20	10-22.5	265/75R22.5			4437	130		24
10.00-20	11-22.5	275/70R22.5			4448	138		26
11.00-20	12-22.5	295/75R22.5	275/80R24.5		4461	151	6438	28
10.00-22	275/80R22.5	11-24.5	285/75R24.5					
12.00-20	11.00-22	12-24.5			4486	175	6438	28
13/80R20	315/80R22.5							
295/80R22.5	11.00-24				4470	187		30

5.5MM SQUARE STRAIGHT LINK ALLOY LIGHT TRUCK CAM CHAINS

IDEAL FOR OFF ROAD USE

ALL SIZES FEATURE CAM SIDE CHAIN FOR EASY TIGHTENING

SQUARE LINK CONSTRUCTION ALLOWS FOR INCREASED DURABILITY AND TRACTION

Tire Sizes				Tire Chain Part No.	Wt./Pr. Lbs.	Cross Chain Part No.	Cross Chains per 1/2 Pair	
225/70R17.5 8-19.5	245/70R17	7.50-17	7.00-18	2114CAM	33	9311	14	
P225/75R15 205R16 H78-15LT	P235/75R15 6.50-16LT 225/75R16LT	215/75R14LT 9-14.5MH P235/65R17	215/75R15LT 8.00-16.5	2116CAM	27		11	
P235/70R16 P245/70R16 P245/75R16 P275/60R15 8.75-16.5	215/80R16LT 215/85R16LT 215/70R17.5 255/65R16 8.50-17.5	235/75R15LT 235/75R16LT 245/70R16LT 245/75R15LT	7.00-15TR 7.00-16LT 7.50-15LT 8-17.5	2119CAM	30		12	
P265/75R15 275/60R15LT NR-78-15	215/75R17.5LT 7.00-17LT L78-16LT	235/85R16LT 7.50-15TR 9.50-16.5	245/75R16LT 7.50-16LT	2121CAM	32		12	
P245/70R15 P255/55R18 P255/70R15 255/55R18	235/70R16LT 30X9.50-16 32X10-16 235/75R17.5LT	255/75R15LT 32X9-16 30X9.50-15	10-16.5 29X9.50-15 P275/60R16	P245/65R17 P255/60R17	2129CAM		29	13
10-15LT KR78-15	8.25-15 255/70R16LT	265/70R15LT 245/85R16LT	265/75R15LT 31X10.5-15LT	3110CAM	31		9313	12
11-15LT 32X11.5-15LT PR78-15	12-16.5LT 34X9.50-15 34X9X16	10-17.5 PR78-16 32X11.5X16	31X10.5-16.5 31X11.5-15LT 275/70R16LT	3127CAM	34			13
P275/60R17 265/75R16LT	265/70R17LT 225/70R19.5LT	P265/70R16 8.25-15TR	245/70R19.5LT 255/85R16LT					
12-15LT 33X12.50R16.5 305/85R16LT 33X14.5-15	11L16 33X14X15 325/60R18 35X12.5-17	285/75R16LT 36X13X16 315/75R-16LT 35X13.5-15	P315/70R15 31X13.50-15 35X13.5-16	32X12.50R15 295/75R16 35X14.5-15	3129CAM		39	14



7MM SQUARE STRAIGHT LINK CHAINS

MANUFACTURED WITH ALLOY STEEL FOR LONG LIFE

Tire Sizes					Single				Dual-Triple				Cross Chain Part No.
					Non-Cam Part No.	Cam Type Part No.	Wt./Pr. (Lbs.)	Number of Cross Chains	Non-Cam Part No.	Cam Type Part No.	Wt./Pr. (Lbs.)	Number of Cross Chains	
7.00-15TR	7.50-15LT	7.00-16LT	8.75-16.5	8-17.5	2119	N/A	37	9	N/A	N/A	N/A	N/A	9413
8.50-17.5	235/75R15LT	245/70R15LT	215/80R16	215/85R16LT									
235/75R16LT	215/70R17.5	245/70R17.5	245/75R15LT										
7.50-15TR	7.50-16LT	9.50-16.5	7.00-17LT	235/85R16LT	2121	N/A	41	10	N/A	N/A	N/A		
245/75R16LT	215/75R17.5LT	L78-16LT	NR75-15	275/60R15LT									
10.00-20	11-22.5	275/70R22.5	275/80R22.5	295/75R22.5	2147	2147LG	60	14	4147	4147LG	120	28	
275/80R24.5	285/75R24.5				2149	2149LG	64	15	4149	4149LG	127	30	
10.00-22	11-24.5												

8MM SQUARE STRAIGHT LINK CHAINS

MANUFACTURED WITH ALLOY STEEL FOR LONG LIFE

HEAVY DUTY FOR RUGGED USE

Tire Sizes					Single				Dual-Triple				Cross Chain Part No.
					Non-Cam Part No.	Cam Type Part No.	Wt./Pr. (Lbs.)	No. of Cross Chains	Non-Cam Part No.	Cam Type Part No.	Wt./Pr. (Lbs.)	No. of Cross Chains	
10.00-20	11-22.5	275/70R22.5	275/80R22.5	295/75R22.5	2145HD	2145HDLG	75	13	4145HD	4145HDLG	136	26	9511
275/80R24.5	285/75R24.5												
10.00-22	11-24.5				2149HD	2149HDLG	82	14	4149HD	4149HDLG	149	28	9513

SQUARE STRAIGHT LINK CHAINS

SNOW BLOWER & GARDEN TRACTOR CHAINS

SNOW BLOWER & GARDEN TRACTOR CHAIN



Tire Sizes				2 Link Spacing		4 Link Spacing	
				Tire Chain Part No.	Wt./Pr. Lbs.	Tire Chain Part No.	Wt./Pr. Lbs.
10/10.5 X 2.75	10.25 X 3.25	10 X 3.50	3301G	3	-	-	
12 X 3			3308G	3	-	-	
4.10/3.50 X 4	3.40/3.00 X 5		7106G	3	-	-	
4.10/3.50 X 5	4.10/3.50 X 6	12 X 3.50 X 6	12.25 X 3.50 X 6	3302G	4	-	
5.30/4.50 X 6			3309G	7	-	-	
13 X 5 X 6			7129G	6	-	-	
4.00/4.80 X 8			1301G	11	-	-	
5.00/5.70 X 8			3303G	16	-	-	
16 X 6.50 X 8	15 X 6.00 X 6		3300G	12	-	-	
18 X 6.50 X 8			3312G	14	-	-	
18 X 8.50 X 8			3307G	15	3311G	10	
18 X 9.50 X 8			3305G	16	3306G	9	
20 X 10 X 8	20 X 10 X 10		7145G	20	5320G	13	
20 X 8.00 X 10	20 X 8 X 8		1308G	19	5318G	11	
6 X 12	23 X 7.50 X 12		5313G	19	5312G	11	
8 X 12	23 X 8.50 X 12		4300G	22	4301G	13	
12 X 12	26 X 12 X 12	27 X 12 X 12		5308G	30	5306G	17
23 X 9.50 X 12	23 X 10.50 X 12		5307G	25	5303G	15	
24 X 12 X 12			7164G	25	7165G	15	
8 X 15	25 X 8.5 X 14	27 X 8.50 X 15		1307G	28	1309G	17
27 X 9.50 X 15			5305G	32	5304G	21	
29 X 12 X 15			5323G	66	5316G	41	
31 X 15.5 X 15	33 X 12.5 X 15		5324G	108	9100G	66	
8 X 16			1311G	32	1310G	19	

GRADER & EQUIPMENT CHAINS

(see page 65 for Tire Chain Fit Chart)

Chain Sets		Cross Chain								Side Chain			
Tire Chain Part No.	Wt./Pr. Lbs.	Replace Cross Chain Part No.	Cross Chains Per 1/2 Pr.	Std. Pkg. Qty.	Wt./100pc Lbs.	No. of Links	Cross Hook No.	Inside Length w/hook Inches	Wire Size	Length Inches	Wire Size	Inside Fastener	Outside Fastener
2612	110	6630	14	5	280	17	320	25.01	.375	115.2	.312	5403	713F
2615	125		16	5	280	17	320	25.01	.375	130.6	.312	5403	713F
2624	157	6640	13	5	420	15	317	28.19	.437	121.5	.375	5403	714F
2627	181		15	5	420	15	317	28.19	.437	138.9	.375	5403	714F
2633	198	6650	14	5	520	19	317	34.44	.437	130.2	.375	5403	714F
2636	211		15	5	520	19	317	34.44	.437	138.9	.375	5403	714F
2642	245		18	5	520	19	317	34.44	.437	164.9	.375	5403	714F
2645	328	6660	15	5	840	20	317	39.42	.531	149.1	.437	714F	714F
2657	419	6670	17	5	960	23	317	44.62	.531	167.8	.437	714F	714F
2672	513	6680	17	5	1069	27	317	52.65	.531	167.8	.437	714F	714F

Because the dimensions of Agricultural and Industrial tires vary between tire manufacturers and tread design profiles, it is recommended that chains are pre-fit prior to use.

Tire Size	Roadmaster 0800 Series	DUO Grip DUO Series	Grader 2600 Series
7.2-24	0832	----	----
8.3-24	0822	----	----
9.5-16	0829	----	----
9.5-24	0832	DUO214	----
9.5-28	0836	DUO214	----
9.5-32	0838	DUO226	----
9.5-36	0862	DUO218	----
9.5-38	0862	DUO218	----
9.5-40	----	----	----
9.5R40	----	----	----
10-16.5	0829	----	----
10.5/80-18	0822	DUO225	----
11-38	----	DUO246	----
11.2-24	0836	DUO214	----
11.2-28	0838	DUO226	----
11.2-32	----	DUO218	----
11.2-36	----	----	----
11.2-38	0862	DUO232	----
11.2-44	----	DUO232	----
12-16.5	0822	DUO225	----
12.4-24	0838	DUO229	----
12.4-28	0856	DUO218	----
12.4-36	0862	DUO232	----
12.4-38	0862	DUO232	----
12.4-40	0866	----	----
12.4-42	0866	----	----
12.4-48	----	----	----
12.5/80-18	0832	----	----
13.00-24	----	----	2612
13.00-25	----	----	2612
13.6-16	0850	----	----
13.6-24	0858	DUO240	----
13.6-26	0858	DUO240	----
13.6-28	0859	DUO260	----
13.6-36	0866	DUO246	----
13.6-38	0866	DUO246	----
13.9-36	----	DUO242	----
14-17.5	0850	----	----
14.00-20	----	----	2612
14.00-21	----	----	2612
14.00-24	----	----	2615
14.00-25	----	----	2615
14.9-24	0859	DUO240	----
14.9-26	0869	DUO250	----
14.9-28	0869	DUO252	----
14.9-30	0876	DUO252	----
14.9-38	----	DUO254	----
14.9-46	0894	----	----
15-19.5	0836	----	----
15.5-25	----	----	2612
15.5-38	0879	DUO254	----
16.00-20	----	----	2624
16.00-21	----	----	2624
16.00-24	----	----	2627
16.00-25	----	----	2627
16.9-24	0874	DUO260	----
16.9-26	0876	DUO262	----
16.9-28	0876	DUO262	----
16.9-30	0885	DUO271	----
16.9-32	----	DUO266	----
16.9-34	0879	DUO270	----
16.9-38	----	DUO272	----
17.5-24	0874	DUO263	----

Tire Size	Roadmaster 0800 Series	DUO Grip DUO Series
17.5L-24	0874	DUO263
17.5-25	----	----
18.00-24	----	----
18.00-25	----	----
18.00-26	----	----
18.00-33	----	----
18.4-16.1	----	DUO264
18.4-24	0883	DUO268
18.4-26	0883	DUO271
18.4-28	0884	DUO271
18.4-30	0885	DUO271
18.4-34	0887	DUO273
18.4-38	0889	DUO272
18.4-42	0894	DUO277
18.4-46	----	DUO277
19.5L-24	0883	DUO268
19.5-32	----	----
20.5-25	----	----
20.8-34	----	DUO272
20.8-38	----	DUO276
21L-24	0885	DUO275
21.5L-16.1	----	DUO264
24.5-32	----	DUO282
23.1-34	----	DUO282
23.5-25	----	----
26.5-25	----	----
28.1-34	----	DUO282
29.5-25	----	----
30.5R32	----	----
41x14.00-20	0852	----
230/95R32	0838	DUO226
230/95R36	0856	----
230/95R44	----	DUO270
260/70R16	0829	----
270/95R44	0866	DUO232
280/70R20	0822	DUO225
290/90R38	0862	----
300/70R20	0822	DUO225
315/75D15	0822	DUO225
320/70R24	0852	----
320/85R24	0838	----
320/85R34	----	DUO242
320/85R38	0874	DUO260
320/90R46	----	DUO254
340/85R28	----	DUO260
355/80R20	0836	DUO226
360/70R20	0836	----
360/70R28	0859	----
380/70R20	0836	----
380/70R24	0858	----
380/85R34	0877	DUO260
380/90R50	----	DUO272
380/90R54	----	DUO277
420/80R46	0894	DUO272
480/85R34	----	DUO273
540/65R30	0885	DUO271
550/65R25	0884	DUO271
600/65R25	0887	DUO273
600/65R28	----	DUO271
620/70R42	----	DUO282
650/75R32	----	DUO282
710/70R38	----	----
755/70R25	----	----
800/65R32	----	----

TWIST LINK CROSS CHAIN – CONTINUOUS - HARDENED



Part No.	Material Diameter		Wt. per 100 Ft. (Lbs.)	Pitch Length	Cartons	Drums
	Inches	Decimal			Ft./Pkg.	Ft./Pkg.
CROSS 3/0	1 ³ / ₆₄	0.207	35	0.920	100	–
CROSS 5/0	1 ⁵ / ₆₄	0.234	47	1.000	100	–
CROSS 6/0	9 ³ / ₃₂	0.281	65	1.250	100	800
CROSS 7 NEW	5 ¹ / ₁₆	0.312	77	1.390	100	700
CROSS 7/0	5 ¹ / ₁₆	0.312	88	1.090	100	700
CROSS 9/0	3 ³ / ₈	0.375	124	1.265	100	500
CROSS 9T	3 ³ / ₈	0.375	115	1.650	100	500
CROSS SQ11	3 ³ / ₈	0.375	156	–	–	300
CROSS 11/0	7 ¹ / ₁₆	0.437	166	1.563	50	300
CROSS 14/0	1 ⁷ / ₃₂	0.531	254	1.734	50	200

SQUARE STRAIGHT LINK ALLOY CROSS CHAIN – CONTINUOUS - HARDENED



Part No.	Material Diameter	Wt. per 100 Ft. (Lbs.)	Pitch Length	Cartons	Drums
				Ft./Pkg.	Ft./Pkg.
CROSS SL7MM	7 mm	90	0.955	100	100
CROSS SL8MM	8 mm	112	1.15	100	100
CROSS SL10MM	10 mm	160	1.49	100	300

STRAIGHT LINK SIDE CHAIN – CONTINUOUS - UNHARDENED



Part No.	Material Diameter		Wt. per 100 Ft. (Lbs.)	Pitch Length	Cartons	Drums
	Inches	Decimal			Ft./Pkg.	Ft./Pkg.
SIDE 2/0*	3 ¹ / ₁₆	0.192	27	1.296	100	–
SIDE 4/0	7 ¹ / ₃₂	0.218	34	1.390	100	–
SIDE 6/0	9 ³ / ₃₂	0.281	60	1.810	100	1000
SIDE 7/0	5 ¹ / ₁₆	0.312	68	1.920	100	800
SIDE TRAC7	5 ¹ / ₁₆	0.312	66	2.127	100	800
SIDE 9/0	3 ³ / ₈	0.375	104	2.170	100	500
SIDE 11/0	7 ¹ / ₁₆	0.437	140	2.330	100	350


*Standard finish is zinc plated.

CHAIN REPAIR PARTS

WIRE DIAMETER CROSS REFERENCE CHART				
Trade Size	Decimal Diameter	Fractional	Metric	Actual Min./Max.
#1	.162	–	4.11mm	.160/.163
1/0	.177	1 ¹ / ₆₄	4.50mm	.174/.177
2/0	.192	3 ¹ / ₁₆	4.88mm	.189/.193
3/0	.207	1 ³ / ₆₄	5.26mm	.205/.208
4/0	.218	7 ¹ / ₃₂	5.54mm	.210/.213
.234	.234	1 ⁵ / ₆₄	5.94mm	.234/.238
6/0	.281	9 ³ / ₃₂	7.14mm	.275/.279
7/0	.312	5 ¹ / ₁₆	7.92mm	.298/.303
9/0	.375	3 ³ / ₈	9.53mm	.364/.369
11/0	.437	7 ¹ / ₁₆	11.10mm	.425/.430
14/0	.531	1 ⁷ / ₃₂	13.49mm	.520/.525


SIDE CHAIN FASTENERS

Part No.	Used With	Standard Pkg Quantity	Weight per Pkg (Lbs.)
5308F	passenger, light truck	24 pieces	2
5310F	tractor chains	12 pieces	3
20064	medium & heavy truck, grader	12 pieces	6
20093	heavy grader	1 piece	1
680	6/0, 7/0 & 9/0 side	30 pieces	20



CROSS CHAIN HOOKS


Part No.	Material Size		Description	Standard Pkg Quantity	Weight per Pkg (Lbs.)
	Inches	Decimal			
20051	1/4	.250	light truck	50	4
20053	5/16	.312	med. truck	50	8
20055	3/8	.375	heavy truck	50	13
317	7/16	.437	graders	50	22
20057	13/32	.406	Nu-Way tractor	50	19
*SWIVEL 9N	7/16	.437	*9/0 swivel hook	50	11
SWIVEL 11	9/16	.536	11/0 swivel hook	50	23
RUGGO	3/8	.375	swivel hook w/ rubber washer		



* without washer


QUICK HOOKS

Part No.	Material Size		Description	Standard Pkg Quantity	Weight per Pkg (Lbs.)
	Inches	Decimal			
20082	1/4	.250	light truck	25	2
20084	11/32	.344	medium truck	25	4
20085	13/32	.406	heavy truck	25	7




CROSS CHAIN REPAIR LINKS

Part No.	Material Size		Description	Standard Pkg Quantity	Weight per Pkg (Lbs.)
	Inches	Decimal			
RAY #1	13/64	.207	passenger car	50	2
RAY #2	1/4	.250	light single truck	50	2
RAY #4	5/16	.312	heavy duty	25	5




RAPID LINKS

Part No.	Material Size		Working Load Limit	Standard Pkg Quantity	Weight per Pkg (Lbs.)
	Inches	Decimal			
RAPID 18	1/8	-	220	10	1
RAPID 316	3/16	-	660	10	1
RAPID 14	1/4	-	880	10	1
RAPID 516	5/16	-	1760	10	2
RAPID 38	3/8	-	2200	5	2
RAPID 12	1/2	-	3300	5	3




SIDE CHAIN REPAIR LINKS

Part No.	Material Size-Nominal Size	Description	Standard Pkg Quantity	Weight per Pkg (Lbs.)
LAP 14	1/4 x 1 1/4	lt. truck, heavy pass.	50	3
LAP 516	5/16 x 1 1/2	heavy truck	50	7
LAP 38	3/8 x 1 5/8	tractor	50	11
LAP 12	1/2 x 2 1/2	tractor	25	13



CHAIN REPAIR PARTS

TIRE CHAIN ADJUSTERS



Part No.	Description	Part No.	Std. Package Quantity	Weight per Package (Lbs.)
29110	pass. car - rubber	7429-110-00	30 ctn. (2 per bag)	13
29225	light truck - rubber	7429-225-00	30 ctn. (2 per bag)	18
29229	heavy truck - rubber	7429-229-00	30 ctn. (2 per bag)	30
6302	light truck - spring	7016-302-05	1 pair per container	1
6303	heavy truck - spring	7016-303-05	1 pair per container	1
6304	tractor/grader - spring	7016-304-05	1 pair per container	13

CHAIN REPAIR PLIERS



Part No.	Type - Length	Part No.	Description	Std. Package Quantity	Weight per Package (Lbs.)
LINKFIX	small - 6.5"	7017-301-00	reg. passenger	1	1
7303	large - 18"	7017-303-00	truck	1	4
LINKMASTER	x-large - 33.5"	7017-302-23	truck/tractor	1	7

HEAVY EQUIPMENT CHAIN TIGHTENING TOOL



Part No.	Length	Part No.	Description	Standard Package Quantity	Weight per Package
9250	19.75"	7429-250-00	heavy truck / equipment	1	12

WEBBING SLINGS

ENDLESS (EN) – TYPE V

A versatile sling for general use. Unlimited ways of rigging; not limited by configuration of the sling.



Width	Part No.	Width	Length	Rated Capacity lbs.		
				Choker	Vertical	Basket
1"	EN2-X91	-	-	4,960	6,200	12,400
1½"	EN2-X915	-	-	7,440	9,300	18,600
2"	EN2-X92	1"	12"	9,920	12,400	24,800
3"	EN2-X93	1½"	12"	14,880	18,600	37,200

EYE & EYE (EE) — TYPES III & IV

A versatile sling for general use. Use in choker, basket, or vertical hitches. Half twist eyes recommended when using slings in choker hitch.



For half twist eyes specify HT after part number.

Width	Part No.	Eye Width	Eye Length	Rated Capacity lbs.		
				Choker	Vertical	Basket
1"	EE2-X91	1"	9"	2,480	3,100	6,200
1½"	EE2-X915	1½"	9"	3,760	4,700	9,400
2"	EE2-X92	2"	9"	4,960	6,200	12,400
3"	EE2-X93	1½"	12"	7,440	9,300	18,600

REVERSED EYE (RE) — TYPE VI

The work horse of all web slings. Use in choker, basket or vertical hitches. When application is continuous or abusive will out live all other sling types. RE slings have wear pads both sides of body and eyes.



Width	Part No.	Eye Width	Eye Length	Rated Capacity lbs.		
				Choker	Vertical	Basket
2"	RE2-X91	1"	12"	6,160	7,700	15,400
3"	RE2-X915	1½"	12"	9,280	11,600	23,200
4"	RE2-X92	2"	18"	11,000	14,500	29,000

CHAIN REPAIR TOOLS & SLINGS


NOTICE

All items on this page are for *towing* and *binding* applications only!
NOT intended for overhead lifting!

**LOG CHAIN
 BULK CHAIN**

Trade Size Inches	Working Load Limit	Feet / Drum	Approx. Weight lbs. per 100 ft.	Material Size Decimal	Length* Inches	Width* Inches
Transport Chain – Grade 70						
1/4"	3150	800	74	0.275	1.24	0.460
5/16"	4700	550	100	0.330	1.15	0.490
3/8"	6600	400	145	0.397	1.30	0.600
1/2"	11300	200	265	0.520	1.56	0.810
Alloy Chain – Grade 80						
3/8"	7100	400	150	0.397	1.22	0.570
1/2"	12000	200	261	0.520	1.56	0.752

*Nominal inside link dimensions. Nominal weights and dimensions are subject to a plus or minus tolerance of 4%

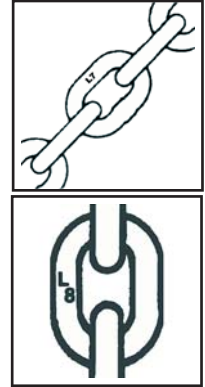


TRANSPORT TOW & BINDER CHAIN ASSEMBLIES

Part No.	Trade Size	Length in Feet	WLL [^]	Pieces per Drum	Weight per Chain
P751620	5/16"	20	4700	25	22
P73816	3/8"	16	6600	25	25
P73820	3/8"	20	6600	25	32
P71220	1/2"	20	11300	10	58




LOAD BINDERS

Part #	Chain Rating		Type	WLL [^]	Package	Weight (lbs)
	Grade 70	Grade 40				
W-1	-	1/4"	Lever	3150	1	3
7-1	5/16"	3/8"	Lever	5400	1	7.5
A-1	3/8"	1/2"	Lever	9200	1	13
R-7	5/16"	3/8"	Ratchet	5400	1	12.5
R-A	3/8"	1/2"	Ratchet	9200	1	13.5
R-C	1/2"	5/8"	Ratchet	13,000	1	16



**HOOKS
 CLEVIS GRAB HOOKS**

Part No.	Chain Size	Grade	WLL [^]	Package	Weight (lbs)
GRAB 70-516	5/16"	70	4700	10	8
GRAB 70-38	3/8"	70	6600	10	12
GRAB 80-14	1/4"	80	3500	10	5
GRAB 80-516	5/16"	80	4500	10	8
GRAB 80-38	3/8"	80	7100	10	10
GRAB 80-12	1/2"	80	12,000	10	20



CLEVIS SLIP HOOKS

Part No.	Chain Size	Grade	WLL [^]	Package	Weight (lbs)
SLIP A 14	1/4"	70	2750	10	5
SLIP A 516	5/16"	70	3600	10	8
SLIP A 38	3/8"	70	5550	10	13
SLIP A 12	1/2"	70	9400	10	19



[^]WLL = Working Load Limit in lbs.

LOG CHAIN